




MC6S 12.9 OBEH
Insexskruv enligt DIN 912, ISO 4762

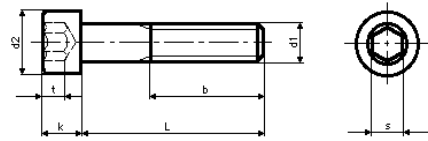

Förpackning	500st	500st	500st	500st	200st	200st
	tom L 50	tom L 50	tom L 30	tom L 30	tom L 80	tom L 30
	200st	200st	200st	200st	100st	100st
						tom L 110
						50st


d1	M3	M4	M5	M6	M8	M10
d2	5,5	7	8,5	10	13	16
b	18	20	22	24	28	32
k	3	4	5	6	8	10
s	2,5	3	4	5	6	8
t min.	1,3	2	2,5	3	4	5

Längd	M3	M4	M5	M6	M8	M10
4
5
6
8
10
12
14
16
18
20
22
25
30
35
40
45
50
55
60
65
70
75
80
85
90
100
110
120
130
140
150
160
180
200
220
240
260
280
300

Dimensionerna ovanför trappstegen är helgängade.



MC6S 12.9 OBEH
Insexskruv enligt DIN 912, ISO 4762

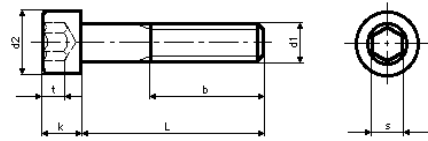

Förpackning	100st	100st	50st	25st	25st	10st	10st	1st
	tom L 60	tom L 40	tom L 60	tom L 150	tom L 80	tom L 120	tom L 80	
	50st	50st	25 st	10st	10st	1st	1st	
	tom L 200	tom L 130	tom L 300	tom L 200	tom L 150			
	25st	25st	10st	1st	1st			

	M12	M14	M16	M20	M24	M27	M30	M36
d1	M12	M14	M16	M20	M24	M27	M30	M36
d2	18	21	24	30	36	40	45	54
b	36	40	44	52	60	66	72	84
k	12	14	16	20	24	27	30	36
s	10	12	14	17	19	19	22	27
t min.	6	7	8	10	12	14	16	19

Längd	M12	M14	M16	M20	M24	M27	M30	M36
16	•							
18	•							
20	•	•						
22	•							
25	•	•	•					
30	•	•	•	•				
35	•	•	•	•			•	
40	•	•	•	•	•		•	
45	•	•	•	•	•		•	
50	•	•	•	•	•	•	•	•
55	•	•	•	•	•	•	•	•
60	•	•	•	•	•	•	•	•
65	•	•	•	•	•	•	•	•
70	•	•	•	•	•	•	•	•
75	•	•	•	•	•	•	•	•
80	•	•	•	•	•	•	•	•
90	•	•	•	•	•	•	•	•
100	•	•	•	•	•	•	•	•
110	•	•	•	•	•	•	•	•
120	•	•	•	•	•	•	•	•
130	•	•	•	•	•	•	•	•
140	•	•	•	•	•	•	•	•
150	•	•	•	•	•	•	•	•
160	•	•	•	•	•	•	•	•
180	•	•	•	•	•	•	•	•
200	•	•	•	•	•	•	•	•
220	•	•	•	•	•	•	•	•
240	•	•	•	•	•	•	•	•
260	•	•	•	•	•	•	•	•
280	•	•	•	•	•	•	•	•
300	•	•	•	•	•	•	•	•
400	•		•	•	•	•	•	•

Dimensionerna ovanför trappstegen är helgängade.