




U6S 8.8 UNF gänga FZB
Sextantbult enligt ANSI B18.2.1

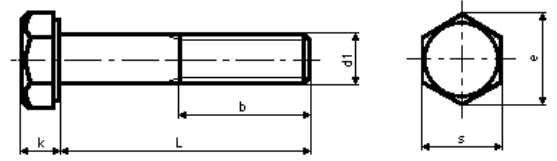

d1	1/4"	5/16"	3/8"	7/16"	1/2"	5/8"	3/4"
b L ≤ 6"	19	22	25	28	32	38	44
e max.	12,8	14,7	16,5	18,3	22	27,5	33
k	4	5,2	6	7,1	7,9	9,9	11,9
s	7/16"	1/2"	9/16"	5/8"	3/4"	15/16"	1.1/8"

Längd	1/4"	5/16"	3/8"	7/16"	1/2"	5/8"	3/4"
1/2'	•						
5/8'	•	•	•				
3/4'	•	•	•	•	•		
7/8'	•	•	•	•	•		
1'	•	•	•	•	•	•	
1 1/4'	•	•	•	•	•	•	
1 1/2'	•	•	•	•	•	•	•
1 3/4'	•	•	•	•	•	•	•
2'	•	•	•	•	•	•	•
2 1/4'	•	•	•	•	•	•	•
2 1/2'		•	•	•	•	•	•
2 3/4'			•	•	•	•	•
3'		•	•	•	•	•	•
3 1/4'					•	•	
3 1/2'			•	•	•	•	
3 3/4'						•	
4'			•	•	•	•	
4 1/2'					•	•	
5'					•	•	
5 1/2'						•	
6'						•	

Förpackning	100st	100st	100st	100st	100st	50st	50st
			tom L 3"	tom L 2.1/4"	tom L 2.1/4"	tom L 4"	tom L 2.1/4"
			50st	50st	50st	25st	25st

Dimensionerna ovanför trappstegen är helgängade.